


# ROBUST WALL PUTTY

THE ORIGINAL WHITE CEMENT PUTTY

AN ITALIAN TECHNOLOGY

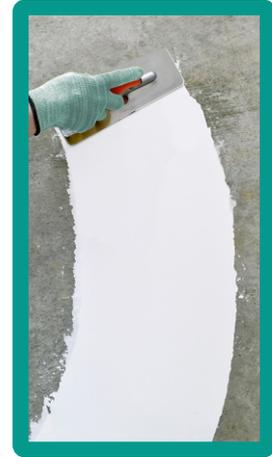

STOPS  
FLAKING



SMOOTH  
FINISH



MORE  
DURABILITY



HIGHER  
COVERAGE




AI - POWERED



“ Discover ROBUST BUILDING SOLUTIONS-a leading provider of white cement and polymer-based solutions. Our range includes Wall putty, Waterproof Putty, Coarse Putty, Wall Texture, Primers, Tile Adhesives, Ready Mix Plaster, Block Jointing Mortar, General Purpose Mortar, Grouts (Cementitious and Epoxy), Gypsum Plaster, and White Cement. Crafted with the finest materials and Italian technology, our products guarantee unmatched quality and customer satisfaction. Elevate your spaces with elegance and endurance.”

“ Transform your walls with Robust Wall Putty (S.F) a cutting-edge, white cement and polymer-based solution made with advanced Italian technology. Perfect for both interior and exterior surfaces, this unique formulation offers greater coverage and a smooth finish. Its powerful bonding agents ensure that your paint stays put and lasts longer, forming an unbreakable bond between surface and paint. With Robust Wall Putty (S.F), you can transform any wall into a work of art that's built to last.”

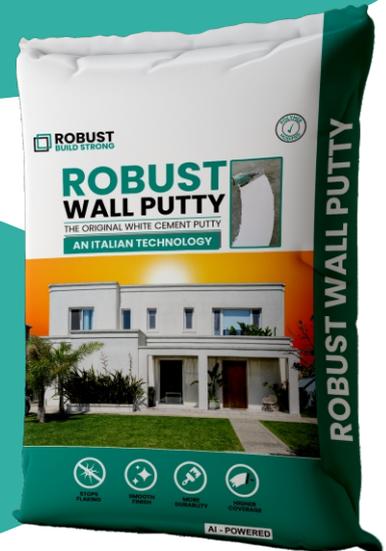

## AREAS OF APPLICATION:



Concrete Walls



Dry Wall Surface



Ceilings



Cementitious and Coarse plaster

## PRODUCT APPLICATION:



Clean surface by removing dirt, plaster, residue, oil, grease, and contaminants. Use wire brush and water to eliminate fungus, algae, moss. Pre-wet before applying ROBUST Wall Putty.



Mix 36-40% clean water with putty to create a smooth paste. Use a mechanical stirrer for best results, ensuring a uniform mixture without lumps.



The thoroughly mixed paste should be applied uniformly on the surface using a putty blade from bottom to top.



Allow the surface to dry for 4-6 hours before applying the second coat of Robust Wall Putty (S.F).



Apply second coat of Robust Wall Putty evenly to smooth out the surface.



Apply a second coat if needed and leave the surface for one day to apply ROBUST Wall Putty (S.F).

**NOTE:** The imported Polymers added in ROBUST Wall Putty help reduce the chances of flaking of the painted surface and enhance its water repelling properties (zero VOC)

## TECHNICAL SPECIFICATIONS:

Test	UOM	Specification of HDB standard	Results	Test method
Tensile adhesion strength 14 days	N/mm <sup>2</sup>	≥ 0.8 MPa	1.6 MPa	EN 1015:12
Compressive Strength after 28 days	N/mm <sup>2</sup>	7 to 12 MPa	8 MPa	EN 1015:11
Setting time IST FST	minutes	240-360 minutes ≤ 500 minutes	300 minutes 420 minutes	EN 196
Water Absorption	Kg/m <sup>2</sup> /vh	----	1	DIN 52617
Water Retentivity	%	>95%	99.5%	BS 4551:1
Pot life	hours	---	3-4hrs	---

**NOTE:** Specifications may be subject to change without prior notification. The results presented are representative but are based on the test procedures employed. The actual performance in the field will vary depending on the application.

## PRECAUTIONS WHILE APPLICATION:

### Do's:

- ❖ For incredible outcomes, blend the ROBUST Wall Putty using a mechanical stirrer.
- ❖ During the mixing process, water should be added gradually to the putty, avoiding the opposite approach.
- ❖ ROBUST Wall Putty (S.F) needs attention within 60 days for interior application, and within 30 days for exterior application, after final coat (max 1.5 thick coats) is applied.

### Dont's:

- ❖ Avoid adding the putty into water.
- ❖ Avoid applying ROBUST Wall Putty on dry surfaces. After application, refrain from vigorously rubbing or using rough emery paper, as it damages the protective film and reduces water repellence.

## PRECAUTIONS DURING USAGE:

- ❖ While the mixture and handling process should be done with caution to prevent inhalation of dust, it is important to note that the materials involved are non-toxic.
- ❖ Wash eyes/mouth with water if contacted. Store in dry place, away from children's reach.

## AVAILABLE PACKS:



## STORAGE & SHELF LIFE:

This product has a shelf life of 12 months from the date of manufacturing when it is unopened. To ensure optimal quality, please store it in a cool and dry place.

## OUR PROMISE:

At ROBUST BUILDING SOLUTIONS PVT. LTD., we value your satisfaction and strive to provide exceptional customer support. We understand that effective communication and prompt assistance are crucial in resolving any concerns or issues you may encounter. Our dedicated team of support professionals is here to ensure your experience with our products and services is nothing short of outstanding.

Registered office:

**Robust Building Solutions Pvt. Ltd.**

Plot No.3, Flat No.C-302, Myhome Abhra, Raidurg,  
Hyderabad TG 500081 IN

Helpline No.: 93922 44365

Website: [www.robustbuildingsolutions.com](http://www.robustbuildingsolutions.com)

E-mail: [customercare@robustbuildingsolutions.com](mailto:customercare@robustbuildingsolutions.com)

Made In India



**DISCLAIMER:** Data sheet content is based on reliable information. ROBUST BUILDING SOLUTIONS isn't liable for any loss or damage, including negligence. Users are responsible for testing product suitability. No guaranteed results due to uncontrollable usage conditions.

**Disclaimer:** All disputes are subject to Hyderabad jurisdiction only